


MODUL

WC system compact for wall-hung toilets



TECHNICAL DRAWINGS

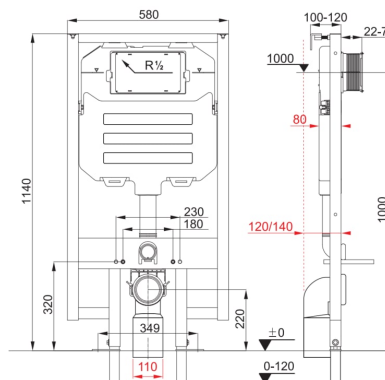

FEATURES

For wall-hung WCs with self-supporting steel frame, depth of 8 cm, anchored to the back wall, pre-drilled holes in the frame, suitable for plasterboard structure installation, the frame suitable for plasterboard structure installation, the cistern is anti-dew insulated, structure load-carrying capacity of 400 kg, massive self-supporting steel frame, silent inlet valve, push-buttons can be replaced as requested, various flushing options 2/4 litres, 3/4.5 litres or 3/6 litres, an insulated elbow to protect from dew formation at the module and water pipes, outlet elbow DN 90/110, floor installation with an adjustable height. NOTE: the concealed module flushing is factory-set to 3/6 litres.

Adjustable flushing volume: **Dual flush 2/4 litres, Dual flush 3/4.5 litres,**

Dual flush 3/6 litres

Operating plate position: **Frontal**

Suitable for: **Wall-hung toilet**

COMPATIBLE WITH



Wall-hung WC, shortened,
horizontal outlet

H823382###0001



Wall-hung WC, Rimless,
visible montage, horizontal
waste

H820616###0001



Wall-hung WC, Rimless,
horizontal outlet

H820614###0001



Wall-hung WC, Rimless,
horizontal outlet

H820714###0001



Wall-hung WC, horizontal
outlet

H823380###0001



Wall-hung WC, Rimless,
horizontal outlet

H821384###0001



Wall-hung WC,
Vortex/Rimless

H821421###0001



PL3-E, non-contact plate
with infrared sensor,
Antivandal

H890656###0001



PL3 single flush plate

H893660###0001



PL3 dual flush plate

H893662###0001



PL3 dual flush plate

H893663###0001



PL3 dual flush plate

H893664###0001



PL9 dual flush plate

H893676##0001

Modul

Top quality, technology and easy installation of concealed modules, modern flush plates design - all this brings the Modul collection.

